

(original size)


- 16 Bit Sigma-Delta Converters
- 6 fully differential Inputs
- Single Resistor programmable Input Gain
- High DC-Accuracy
- Sampling Frequency  
12.5 to 200 kHz programmable
- Synchronous Sampling of all input channels  
maintains phase relationship
- up to four boards can be cascaded and  
synchronously sampled
- Interrupt and DMA-driven data transfer
- Typical Applications:
  - Vibration Analysis
  - Power Line Monitoring
  - Multi-Channel Speech Processing

The D.Module.AD7722 is a high-precision Analog-to-Digital converter board, suitable for all members of the D.Module DSP board family. It's six input channels are DC-accurate and fully differential. Input Gain is set by a single resistor. The oversampling converter architecture doesn't require high-order analogue anti-aliasing filters, hence accurate phase information of the input signals is preserved.

It's excellent DC, phase and dynamic characteristics make the board a preferred choice for a variety of applications like multi-channel speech processing, power-line metering, vibration analysis, and data logging. Up to four boards can be cascaded to a 24 channel, synchronously sampled, system. All channels can be read by a single block transfer, minimizing the CPU load for data acquisition.

## SPECIFICATIONS

Power Supply	Analog: +/- 5 V +/- 5% , TBD mA Digital : 3.3V +/- 5% (5V +/-10% optional) , TBD mA
Operating Temperature	-40..+85°C (industrial grade)
Sampling Frequency	programmable: 12.5, 16.6, 20, 25, 33, 50, 100, 200 kHz, or external clock
Sampling	synchronous sampling of all channels
Group Delay	215 $\mu$ s at 200 kHz sampling frequency
Inputs	6, fully differential, +/- 2.5V full-scale input
Input Gain	single-resistor programmable, 0..+20 dB
Resolution	16 bits
THD & N:	TBD
SINAD	TBD
Digital Interface	16 bits wide data bus, two programmable interrupt outputs
High Level Input Voltage	min. 2V, max. 5.2 V
Low Level Input Voltage	min. -0.2V, max. 0.8V
Size	max. 85 x 58.5 x 15 mm

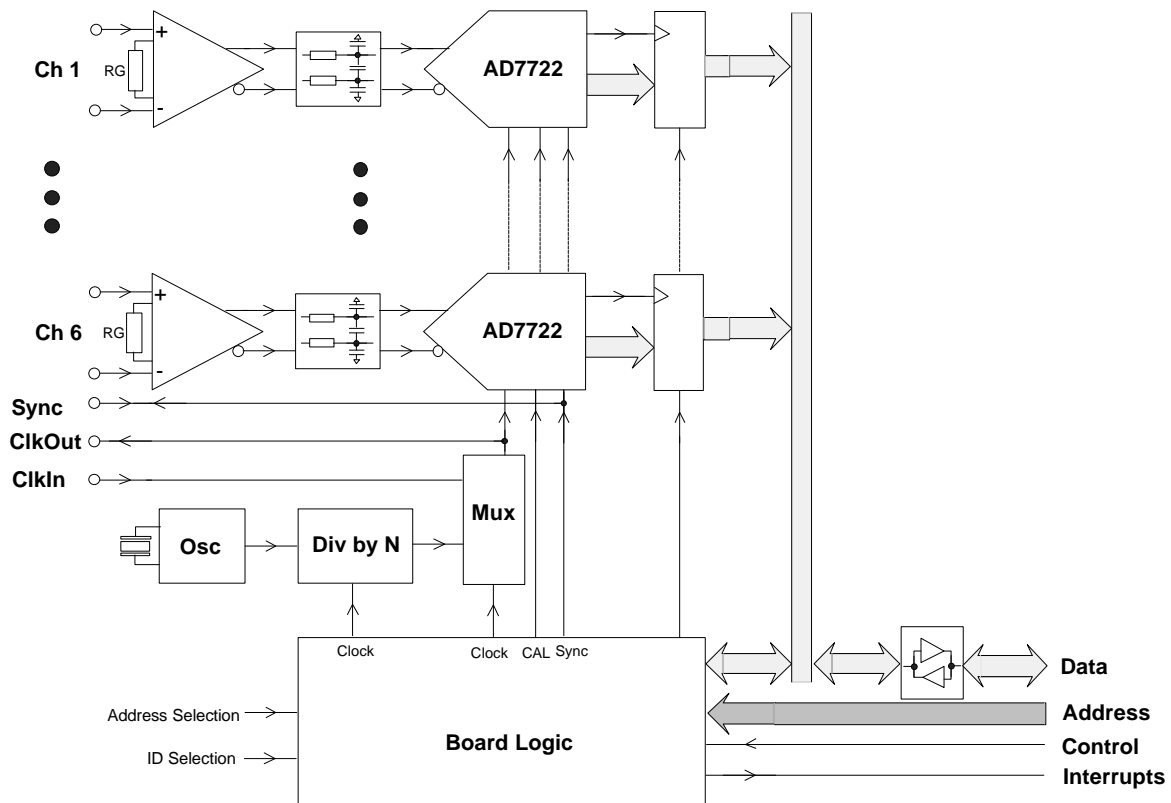

## ORDERING INFORMATION


D.Module.AD7722-6 Six Channel Analog-to-Digital Converter Board

Options  
-1 (single channel)  
-2 (dual channel)  
-4 (quad channel)  
-5V (5V digital interface)

DS.AD7722 Development Support Base Package incl. Support Software, User's Guide and Manuals

For additional information contact your local distributor or D.SignT directly.

**Distributed and supported locally by**



## D.SignT

Digital Signalprocessing Technology

Norbert Nölker & Adolf Klemenz GbR

Gelderner Strasse 36

D-47647 Kerken

phone +49 (0) 2833 / 570 977

fax 49 (0) 2833 / 33 28

email info@dsignt.de

www http://www.dsignt.de